



SPECIFICATIONS
AX SERIES
 RANGE HOODS

HVI CERTIFIED 2100
160 CFM/6.5 Sones @ 0.10" SP. Horizontal
160 CFM/6.5 Sones @ 0.10" SP. Vertical

• **Dimensions**

Overall bottom projection - 18³/₈"
 Overall top projection - 12"
 Height - 6"
 Available widths: 30"

• **Hood Body**

Stainless Steel: 24 gauge, grade 430 stainless steel.
 Painted: 23 gauge cold rolled commercial grade (CRCQ) steel, auto welded, coated with a baked enamel finish.

• **Motor**

2 speed, single coil, thermally protected, permanently lubricated.
 Rated 120 volts, 60 hz.

• **Lighting**

Single 60 watt cook light capacity (bulb not included).

• **Ducting Options**



Horizontal ducting: 3¹/₄"x10" (duct adapter and damper included).
 Vertical ducting: 3¹/₄"x10" (duct adapter and damper included).

• **Fan Blade**

One piece polymeric, electronically balanced blade. 6⁵/₈" diameter with 5 paddles.

• **Electrical connection**

Hood top - 7/8" electrical knockout.
 Hood back - 7/8" electrical knockout.

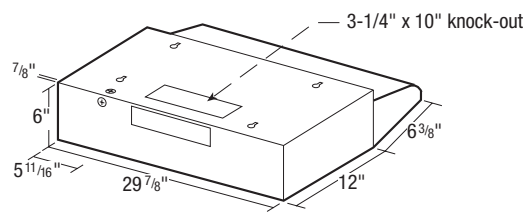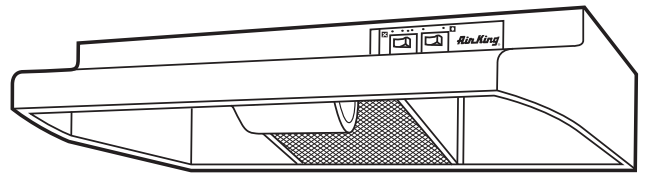

• **Filters**

UL rated, class 2 filter.
 Grease Filter: RF35 - 8⁷/₈"x10³/₈" (included).

• **Available Finishes**

White, Black & Stainless Steel.

EXPANDED PERFORMANCE										
Air Flow - CFM	Static Pressure (inches of w.g.)						Sones @ .1 SP	Fan Speed RPM	Power Watts	Apms
	0	0.05	0.1	0.15	0.2	0.25				
Vertical Ducting	201	180	160	140	117	91	6.5	2680	56.0	2.1
Horizontal Ducting	201	179	160	140	117	95	6.5	2602	56.0	2.1

PROJECT							ARCHITECT			
LOCATION							ENGINEER			
CONTRACTOR							SUBMITTED BY			DATE
FAN NUMBER	MODEL NUMBER	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS	



U.S.: 820 Lincoln Avenue
 West Chester, Pennsylvania 19380-4466
 Tel: (610) 692-7400 • 877-304-3785
 Fax: (610) 696-8048

Canada: 8 Edvac Drive
 Brampton, Ontario L6S 5P2
 Tel: (905) 456-2033 • 800-250-8767
 Fax: (905) 456-1015